

Drywall
09.22.00 (Support for Plaster & Gypsum Board)

PRO-90 Corner Bead


Standard Corner Bead

PRO-90 corner bead is an extra rigid vinyl corner bead designed for stiffness and strength. A slight radius on the nose makes for easy, smooth finishing. Easy-to-apply 90° corner reinforcement that can be nailed or stapled into place. Multiple perforations along the 1-1/4" flanges enhance joint compound bonding. The pronounced nose provides a ground and screed to help the finisher achieve precise finishing depth.

Rigid vinyl is dent resistant, rust proof and maintains shape with no sharp edges or burrs when field cut. All vinyl products readily accept finish treatments such as paint and spray or roll-on textures.

Product Data & Ordering Information:

Product Code	Flanges	Length	Pcs./Ctn.
PRO90-8	1-1/4"	8'	50
PRO90-9	1-1/4"	9'	50
PRO90-10	1-1/4"	10'	50
PRO90-12	1-1/4"	12'	50

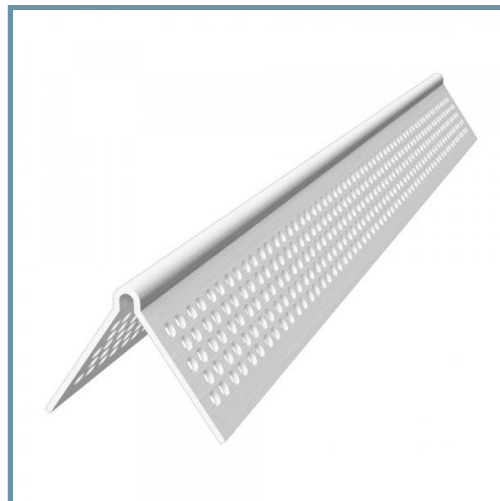

- Easily cut with snips, utility knives or scissors

Code Approvals & Performance Standards

- [ASTM C840](#) Standard Specification for Application and Finishing of Gypsum Board
- [ASTM C841](#) Standard Specification for Installation of Interior Lathing and Furring
- [ASTM C1047](#) Standard Specification for Accessories for Gypsum Wallboard and Gypsum Veneer Base
- [ASTM D1784](#) Standard Classification System and Basis for Specification for Rigid Poly(Vinyl Chloride) (PVC) Compounds and Chlorinated Poly(Vinyl Chloride) (CPVC) Compounds
- [ASTM D3678](#) Standard Specification for Rigid Poly(Vinyl Chloride) (PVC) Interior - Profile Extrusions
- [SDS Vinyl Corp](#) PVC Compounds

Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

